




Specifications

- 1、 Temperature : -55 ~+125
- 2、 Rated Current: 300A
- 3、 Withstand Voltage: 5000V DC
- 4、 Rated Voltage : 1500V DC
- 5、 Ingress Protection: IP67
- 6、 Mechanical Life: 500 times
- 7、 Shielded Function: Yes
- 8、 HVIL Function : Yes
- 9、 Salt spray test : 48h

KRX 18 X - 30 0 -35

Master code: KRX  
 Product type: 18 is 180° straight plug, 28 is 90° plug  
 Positions: X, Y, U, V, W  
 Rated current: 30--300A  
 HVIL: 1 is Yes, 0 is No  
 Wire Range: 35 mm<sup>2</sup>, 50 mm<sup>2</sup>, 70 mm<sup>2</sup>

		KRX18*-30*-**	KRX-GZ
		180° straight plug	

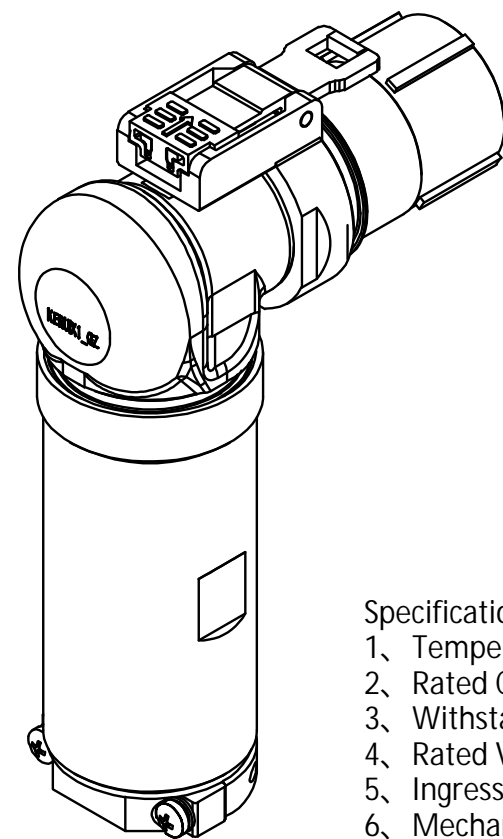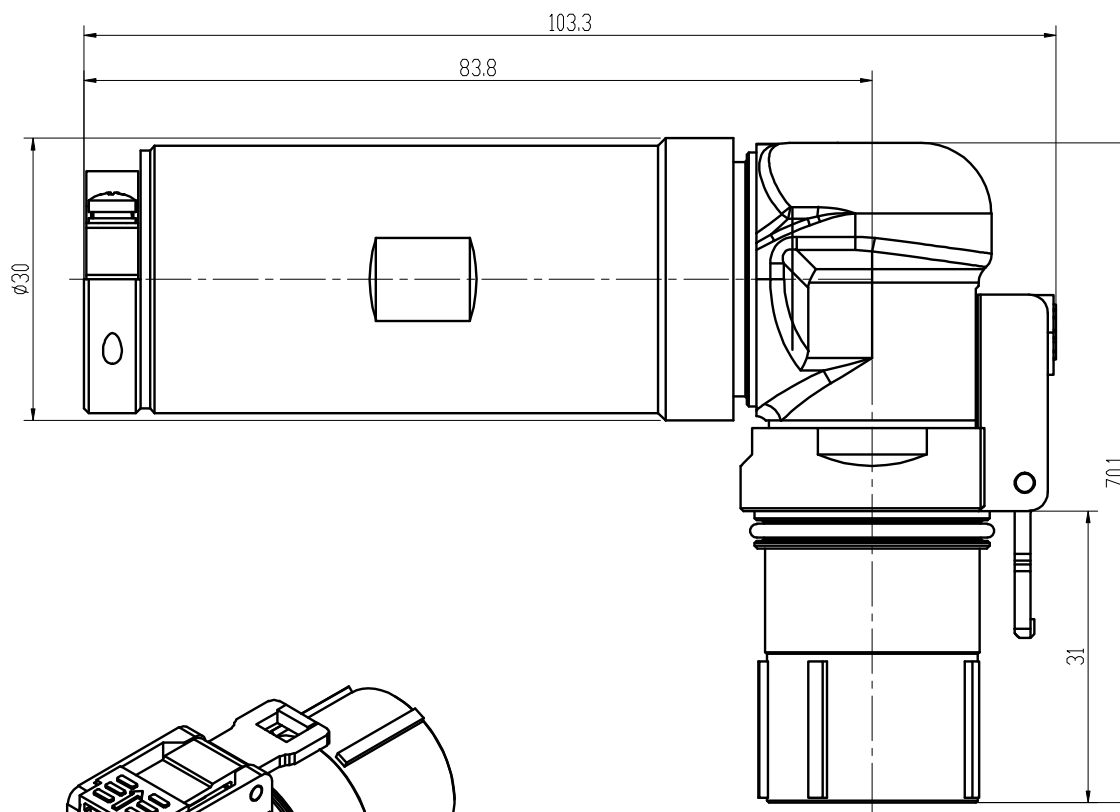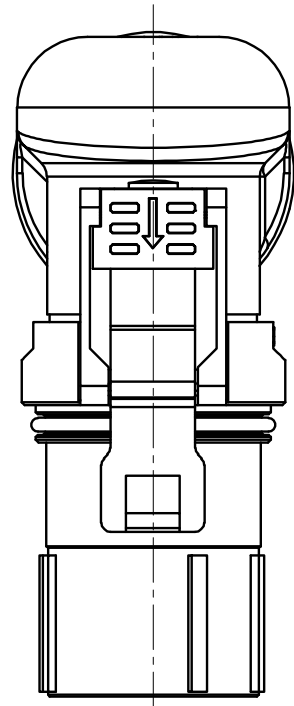

KRX 28 X - 30 0 -35

Master code: KRX  
 Product type: 18 is 180° straight plug, 28 is 90° plug  
 Positions: X, Y, U, V, W  
 Rated current: 30--300A  
 HVIL: 1 is Yes, 0 is No  
 Wire Range: 35 mm<sup>2</sup>, 50 mm<sup>2</sup>, 70 mm<sup>2</sup>

Specifications

- 1、 Temperature : -55 ~+125
- 2、 Rated Current: 300A
- 3、 Withstand Voltage: 5000V DC
- 4、 Rated Voltage:1500V DC
- 5、 Ingress Protection: IP67
- 6、 Mechanical Life: 500 times
- 7、 Shielded Function:Yes
- 8、 HVIL Function : Yes
- 9、 Salt spray test : 48h

			KRX28*-30*-**	KRX-GZ
			90° plug	