

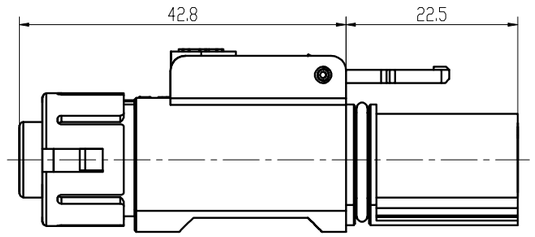

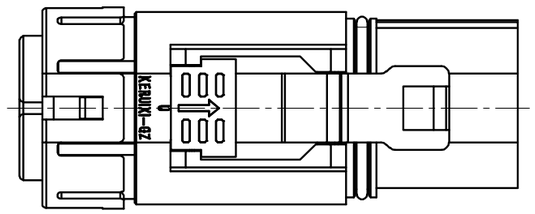

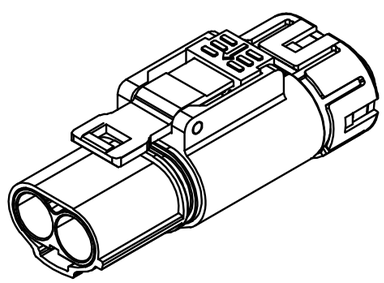

KRX 182 X - 6 0 - 4
① ② ③ ④ ⑤ ⑥
① Master Code: KRX
② Product type: 082 is receptacle, 182 is shielded plug, 482 is unshielded plug
③ Position: X, Y, U
④ Rated current: 6--60A
⑤ HVIL: 1 is YES, 0 is No
⑥ Wire range: 2.5mm2, 4.0 mm2, 6.0 mm2, 10.0 mm2

Specifications
1、Temperature:-55°C ~+125°C
2、RatedCurrent:60A
3、WithstandVoltage:3000VDC
4、IngressProtection:IP67
5、MechanicalLife:500 times
6、ShieldedFunction:Yes
7、HVIL Function：Yes

				KRX*82-60-**	KRX-GZ

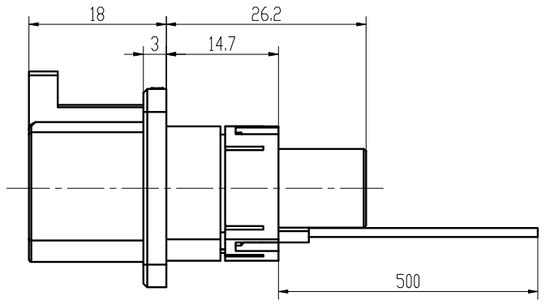

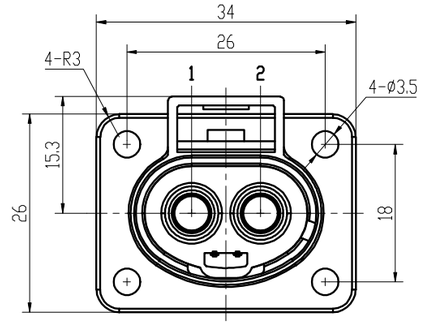

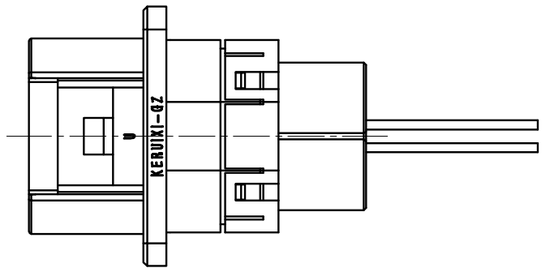

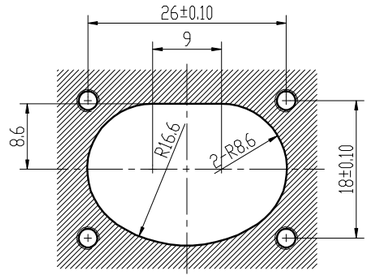

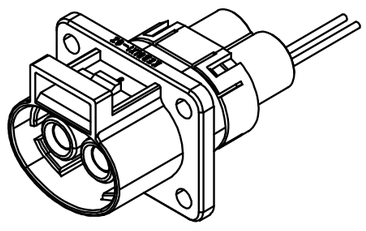

KRX 082 X - 6 0 - 4
① ② ③ ④ ⑤ ⑥

① Master Code: KRX
② Product type: 082 is receptacle, 182 is shielded plug, 482 is unshielded plug
③ Position: X, Y, U
④ Rated current: 6--60A
⑤ HVIL: 1 is YES, 0 is No
⑥ Wire range: 2.5mm2, 4.0 mm2, 6.0 mm2, 10.0 mm2

Specifications
1、Temperature:-55°C ~+125°C
2、RatedCurrent:60A
3、WithstandVoltage:3000VDC
4、IngressProtection:IP67
5、MechanicalLife:500 times
6、ShieldedFunction:Yes
7、HVIL Function：Yes

KRX082-60-**	KRX-GZ